

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

CORNER INDEX No. 1065

TYPE OF MONUMENT: PK nail over concrete monument w/ brass cap

SECTION 1

STATE PLANE COORDINATES: N: 570072.33

TOWNSHIP 12

E: 2583052.27

RANGE 22

ELEVATION: 646.42 M.S.L. DATUM: 1929


FIELD BOOK: K&A folder PAGE: 865

FIELDWORK BY: KAPUR AND ASSOCIATES

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

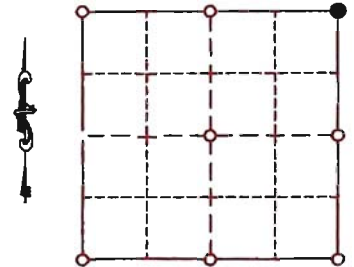

LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

12/09/66 Foster S. Curtiss, S-182, I have set a Concrete monument 8"x18" over the top of Limestone monument recovered 20" under road. Bk. 915, Pg 3
 4/11/91 Ed Harvey Jr S-1489, Fnd Concrete Monument w/ brass cap 2.5" below grade. Set PK nail at grade.
 8/26/93 Ed Harvey Jr. S-1489, dug and found concrete monument w/brass cap there is a 4" PVC pipe over monumnet. Brass cap is 2" below rim of pipe
 10/13/94 Ed Harvey Jr S-1489, Set PK nail at grade after road resurfacing.
 6/28/99 Kapur & Associates visited corner and verified ties during Ozaukee County Remonumentation program.




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark H. Banton
 Ozaukee County Surveyor

DATE: 16 May 2003 1-29-07

TIE SKETCH

- A. 40.01'
- B. 41.00'
- C. 50.16'
- D. 40.00'

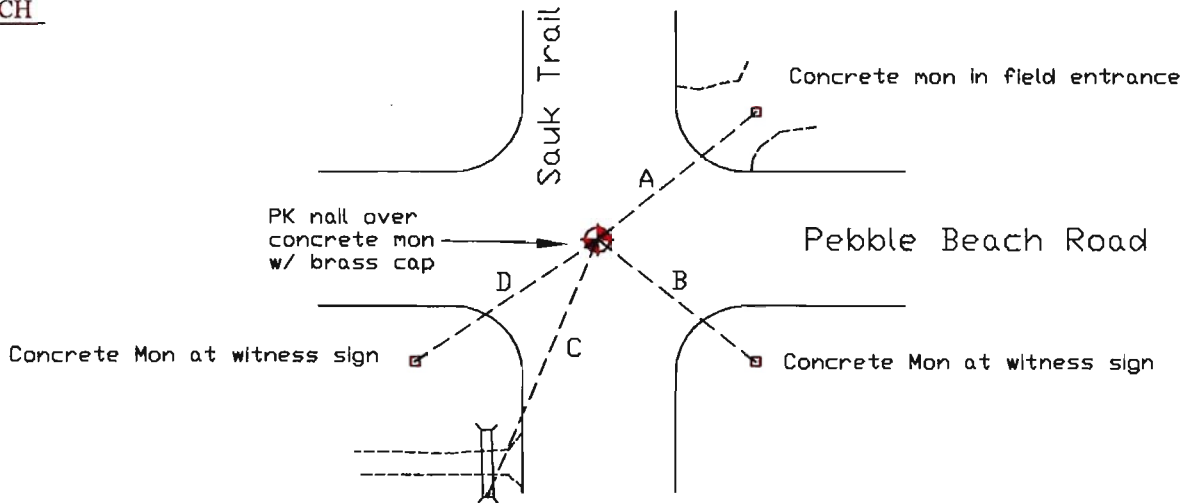

MAINTENANCE RECORD

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
1/29/07	M. Banton	change corner number