

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"**  
**OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: Concrete Monument w/ brass cap

STATE PLANE COORDINATES: N: 569756.68

E: 2569804.55

ELEVATION: 731.18 M.S.L. DATUM: 1929

FIELD BOOK: K&A Folder PAGE: 860

FIELDWORK BY: Kapur and Associates 1999

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 1074

SECTION 3

TOWNSHIP 12

RANGE 22

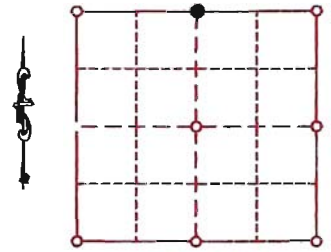

LOCATION

BASIS OF MONUMENT LOCATION

8/29/75 Dennis Van Sluys S-1238, dug 4'x20' hole, 1-1/2' deep. found cut limestone in virgin soil. verified by traverse.  
 4/19/94 Ed Harvey Jr S-1489, found concrete monument w/brass cap at the town of Holland corner and the Town of Belgium corner 3' below grade. set PK nails at grade for both corners.  
 6/30/99 Kapur and Associates visited corner during Ozaukee County remonumentation program  
 2005 -Mark Banton drew dossier to show co-ordinates and elevation of corners per Ozaukee County remonumentation program.

SEAL:




DATA SHOWN HEREON  
 IS CERTIFIED AS CORRECT:

9 Feb 07 Mark Banton  
 Ozaukee County Surveyor

DATE: 10 FEBRUARY 2005

TIE SKETCH

- A= 48.25'
- B= 102.02'
- C= 81.19'
- D= 37.93'
- E= 53.76'
- F= 51.06'
- G= 35.28'
- H= 33.83'

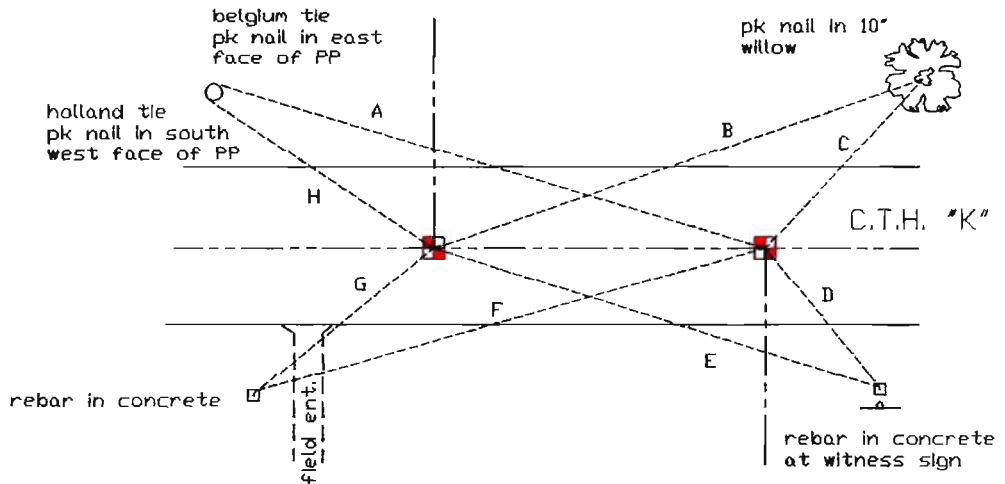

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT ( SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
9 feb 07	m. banton	re-number corner