

# "U.S. PUBLIC LAND SURVEY MONUMENT RECORD" OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Concrete monument with brass cap

STATE PLANE COORDINATES: N: 501685.40

E: 2533076.64

ELEVATION: 881.65 M.S.L. DATUM: 1929

FIELD BOOK: Book 2 PAGE: 61

FIELDWORK BY: Tom Genske & Kapur and Associates-1995

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 454

SECTION 3

TOWNSHIP 10

RANGE 21



LOCATION

### BASIS OF MONUMENT LOCATION

Tom Genske (county surveyor) found and accepted 1"x 22" iron pipe, set 6" concrete monument with brass cap at found iron pipe.

SEAL:




DATA SHOWN HEREON  
IS CERTIFIED AS CORRECT:

*Mark Banton*  
Ozaukee County Surveyor

DATE: 1-9-08

### TIE SKETCH

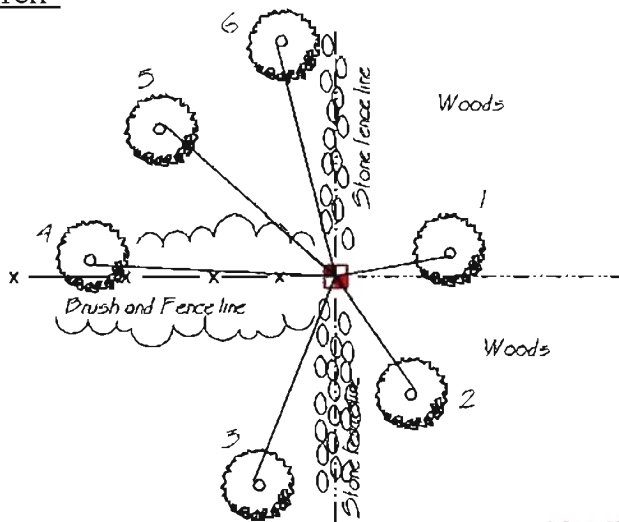

1. DI nail and disc southside of 24" oak, 2.3' above grd.  
Dist = 5.10'
2. DI nail and disc eastside of 7" ash, 2' above grd.  
Dist = 16.25'
3. old Pk nail westside of 8" ash, 2.2' above grd.  
Dist = 26.22'
4. DI nail and disc southside of 15" birch, 1.7' above grd.  
Dist = 15.44'
5. old Pk nail eastside of 24" ash, 1.4' above grd.  
Dist = 26.76'
6. DI nail and disc westside of 11" ash, 2' above grd.  
Dist = 25.51'

### MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT ( SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
1-9-08	M. Banton	re-number corner