

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD" OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: CONCRETE MONUMENT WITH BRASS CAP

STATE PLANE COORDINATES: N: 476030.00

E: 2549911.18

ELEVATION: 702.92 M.S.L. DATUM: 1929

FIELD BOOK: _____ PAGE: _____


FIELDWORK BY: WALLACE NIENOW 1969, KAPUR & ASSOC 1996

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 269
SECTION 31
TOWNSHIP 10
RANGE 22

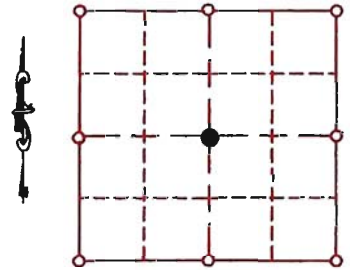

LOCATION

BASIS OF MONUMENT LOCATION

1969-Wallace Nienow (Land Surveyor) - set this monument at the intersection of a line connecting the east and west 1/4 corners with a line connecting the existing north and south 1/4 corners there was no evidence of an old corner, said corner is set 1' east of east end of Cardinal lane.

SEAL:




DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: 1-17-08

TIE SKETCH

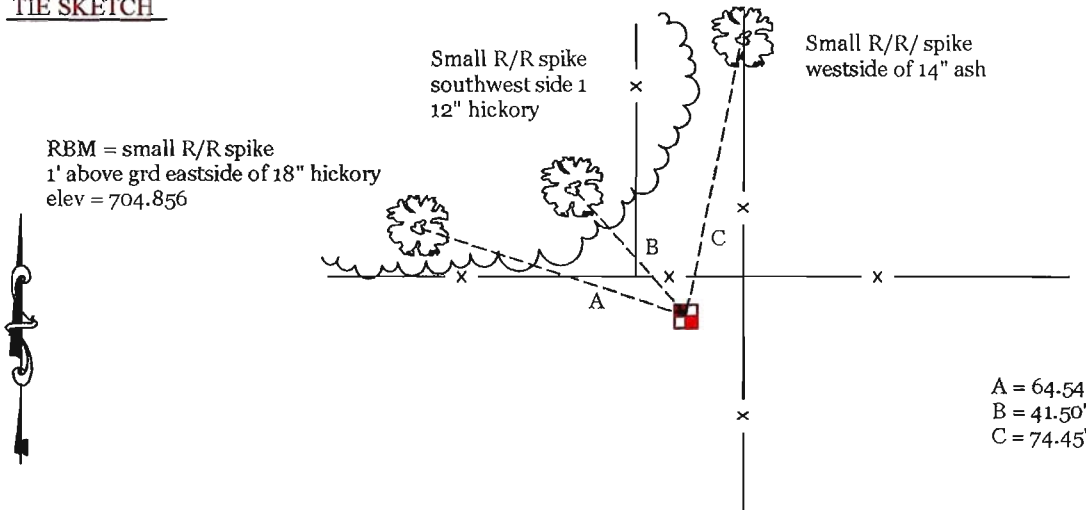

MAINTENANCE RECORD

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
1/17/08	Mark Banton	redraw and renumber