

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

CORNER INDEX No. 628
SECTION 15
TOWNSHIP 11
RANGE 21

TYPE OF MONUMENT: Bernsten plastic monument w/brass cap

STATE PLANE COORDINATES: N: 523497.27

E: 2536457.49

ELEVATION: 883.81 M.S.L. DATUM: 1929

THETA ANGLE: _____


FIELD BOOK: 2 PAGE: 36

FIELDWORK BY: TOM GENSKE 1994

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER



SEAL:

BASIS OF MONUMENT LOCATION

1974 - Harry Brabender - found old limestone monument approximately 20" deep in good condition. set concrete monuments for ties

1980 - Tom Genske - Ozaukee County Surveyor using concrete monument ties, set PK nail at west 1/4 corner and added new ties

1994 - Tom Genske - Ozaukee County Surveyor using 2 existing concrete monument ties found PK nail 1" below road surface, second Pk nail found 2" below surface, damaged limestone monument with damaged top found 24" below road surface. center checked PK nail accepted and replaced with Bernsten plastic monument with brass cap




DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: 11/10/08

TIE SKETCH

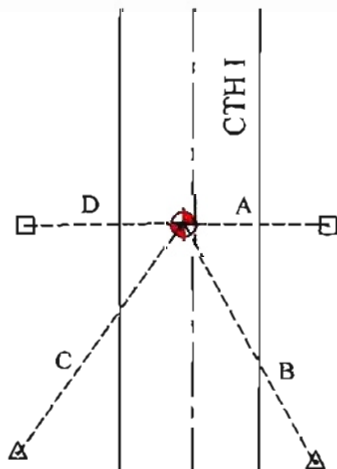

A = 25.03' @ 90°
B = 59.94' @ 165°
C = 59.50' @ 195°
D = 24.78' @ 270°

MAINTENANCE RECORD

- MONUMENT LEGEND**
- = BERNSTEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT W/ BRASS CAP
 - = CONCRETE MONUMENT W/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
11/10/08	M. BANTON	Redraw from tie sheet and re-number corner